



Inklapbare oprijplaat
Rampe de chargement pliable
Foldable loading ramp
Zusammenklappbare Rampe

MAX
200 KG

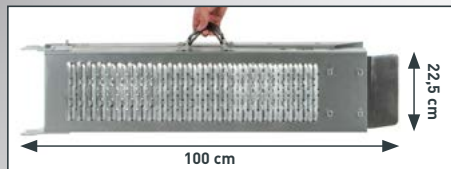

- NL** In staal, inklapbaar.
Met antislipprofiel en schuine onderkant.
- FR** En acier, repliable.
Avec profil antidérapant et dessous en biais.
- EN** In steel, foldable.
Non-slip tread and angled underside.
- DE** Aus Stahl, zusammenklappbar.
Mit rutschfestem Profil und schräger Unterseite.
- ES** De acero, plegables.
Con perfil antideslizante y base inclinada.
- IT** In acciaio, pieghevole.
Con profilo antiscivolo e lato inferiore inclinato.

MAX	200 KG
UITERSTE GRENSTOESTAND ÉTAT-LIMITE ULTIME ULTIMATE LIMIT STATE GRENZUSTAND DER TRAGFÄHIGKEIT	
148 KG	GEBRUIKSBELASTING CHARGE DE TRAVAIL WORKING LOAD NUTZUNGSSTEUER
80 KG	NOMINALE BELASTING CHARGE NOMINALE NOMINAL LOAD NENNLAST
1.35	VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR
2.5	VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR

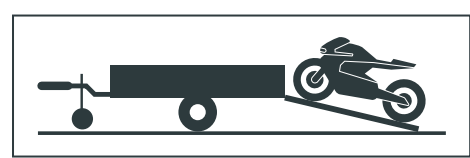

REF.: T725

