





2 oprijplaten in staal
2 rampes en acier
2 steel loading ramps
2 Auffahrrampen aus Stahl

x2

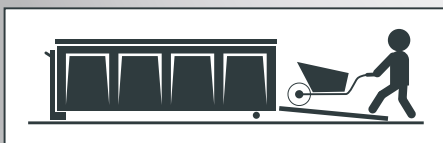

	200 KG x2	UITERSTE GRENSTOESTAND ÉTAT-LIMITE ULTIME ULTIMATE LIMIT STATE GRENZZUSTAND DER TRAGFÄHIGKEIT	
	GEBRUIKSBELASTING CHARGE DE TRAVAIL WORKING LOAD NUTZUNGSSTEUER	VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR	1.35
	NOMINALE BELASTING CHARGE NOMINALE NOMINAL LOAD NENNLAST	VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR	2.5

- NL** In staal, bestaat uit één stuk.
Met antislipprofiel en schuine onderkant.
- FR** En acier, se compose d'une pièce.
Avec profil antidérapant et dessous en biais.
- EN** In steel, single piece.
Non-slip tread and angled underside.
- DE** Aus Stahl, aus einem Stück.
Mit rutschfestem Profil und schräger Unterseite.

REF.: T722S

