





Oprijplaat in staal Rampe en acier Steel loading ramp Auffahrrampe aus Stahl



- NL** In staal, bestaat uit één stuk.
Met antislipprofiel.
- FR** En acier, se compose d'une pièce.
Avec profil antidérapant.
- EN** In steel, single piece.
Non-slip tread.
- DE** Aus Stahl, aus einem Stück.
Mit rutschfestem Profil.

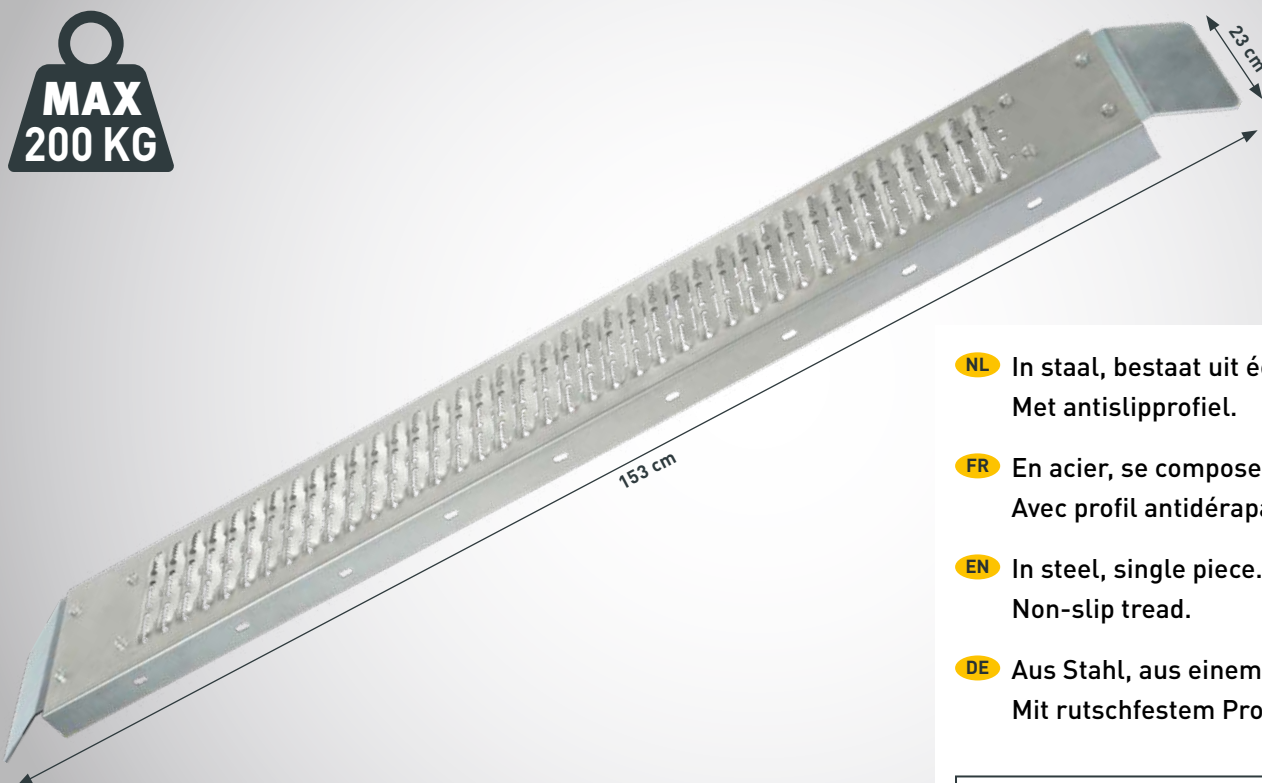

| | | | |
|---|--|--|-------------|
|  | 200 KG | UITERSTE GRENSTOESTAND ÉTAT-LIMITE ULTIME ULTIMATE LIMIT STATE GRENZZUSTAND DER TRAGFÄHIGKEIT | |
|  | GEBRUIKSBELASTING CHARGE DE TRAVAIL WORKING LOAD NUTZUNGSSTEUER | VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR | 1.35 |
|  | NOMINALE BELASTING CHARGE NOMINALE NOMINAL LOAD NENNLAST | VEILIGHEIDSFACOR FACTEUR DE SÉCURITÉ SAFETY FACTOR SICHERHEITSAKTOR | 2.5 |

REF.: T723

